



X-Treme Tablet Generation 2 Speaker Replacement

How to replace a speaker for an X-Treme Tablet Generation 2.

Written By: Kristen John





TOOLS:


- [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Speaker



- Remove back cover. Using a spludger and pry tool, carefully pry the back cover off of the main body, starting at the top corner. Continue around the device, being careful to not dislodge the power button.

Step 2

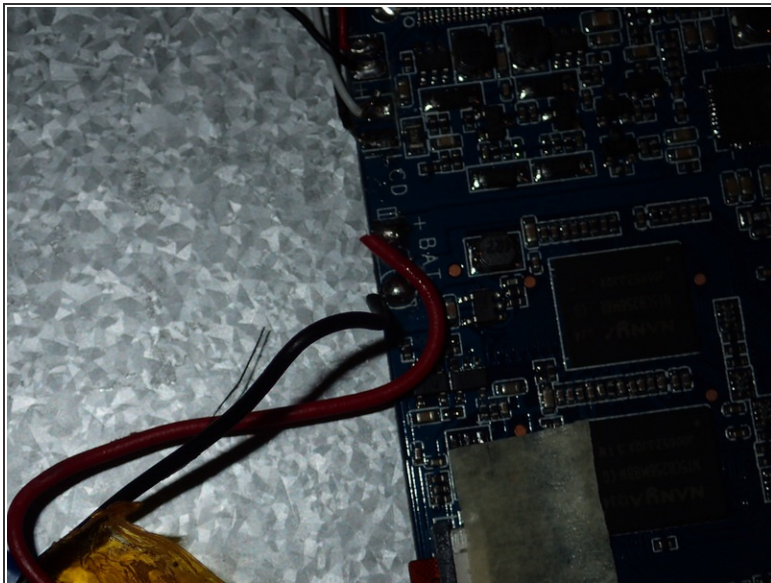

- Remove speaker. Using a solder vacuum and soldering iron, release the red wire from the motherboard first, followed by the black. The speaker is held on the back cover with adhesive tape. Using a pry tool, carefully pry the speaker from the back cover.

To reassemble your device, follow these instructions in reverse order.

